


Product Data Sheet

Knauf Standard Plasterboard

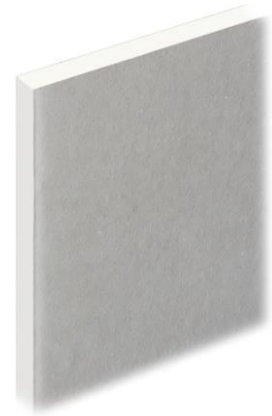

Knauf Standard Plasterboard to meet all drylining requirements. Made from aerated gypsum core, with premium paper liners on either side. Ideally suited to receive a Knauf spray applied finish or Knauf Jointing Finishes before being decorated.

Areas of Application

Suitable as a lining board for wall and ceilings systems with limited fire and acoustic requirements.

Standard plasterboard is not suitable for high humidity areas.

Compliance Standards

AS/NZS 2588:2018;GB9775-2008;EN520 Type A

Key Benefits

- Strong and versatile
- Choice of tapered or square edge Fully recyclable
- Quick and easy to install
- Multiple layers can be used for added performance Provides a smooth surface

Performance Data

Thickness (mm)	Reaction to Fire (R2F)	Thermal Conductivity (W/mK)	Weight Per Square Meter (kg/m ²)
9.5	A2-s1, d0	0.23	6.3
10	A2-s1, d0	0.23	7.2
12	A2-s1, d0	0.23	8.0
13	A2-s1, d0	0.23	8.3
15	A2-s1, d0	0.23	12.6